




Deriblok is the only company to have the most varied and complete range of stretch film for manual use. Supplied with or without a dispenser, with an inner core which has been standardized to international formats 50 mm. (2 inch.) and 75mm. (3 inch.) it is an adhesive stretch film produced by the merging of four different layers during the extrusion process. This stretch film has been produced for all types of unusual packaging and/or limited spaces.

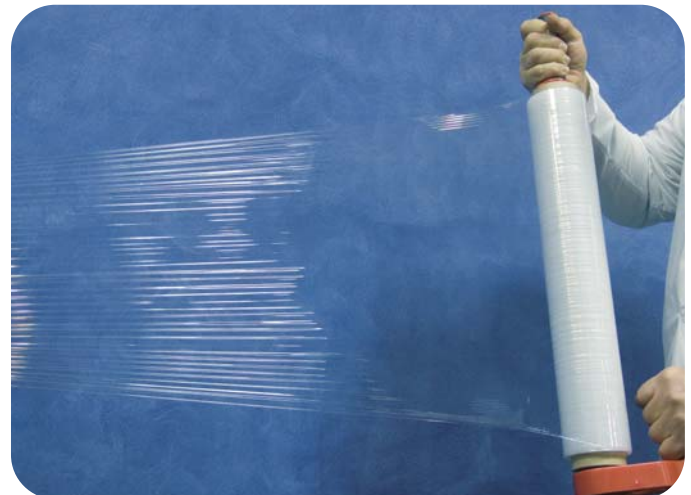

■ TECHNICAL INFORMATIONS

PROPERTIES		STANDARD	MEASURE UNIT	VALUE
BREAKING STRENGTH	LONG	ASTM D 882	KG mm ²	4
	TRASV			2,4
ELONGATION STRENGTH	LONG	ASTM D 882	%	500
	TRASV			750
TEAR STRENGTH	LONG	ASTM D 1922	Gr.	100
	TRASV			200
PUNCTURE STRENGTH		DERIBLOK'S OWN NORMS	Gr.	1500
DART TEST		ASTM D 1709	Gr.	100
GLOSS		ASTM D 2457	%	91
SLIP		ASTM D 1894	-	> 1